

TEL 00086-571-89890529 FAX 00086-571-89890595

Please contact local agents for information in details.



NUOSEN HEAVY MACHINERY CO., LTD.





COMPANY PROFILE

NUOSEN Machinery has been focusing on hydraulic breaker for 12 years, which is one of the largest suppliers of breaker hammers. We established Hangzhou Nuosen Machinery Co., LTD in 2004, and spent 160 million CNY on establishing the production center of Jiangsu NUOSEN Machinery Co.t LTD in the Binhai Port regarded as the large deepwater port with 100 thousand load capacity – Jiangshu Binhai Industrial Park in

2010. The coverage area of production center is about 40000 kilometers square and it is the major support enterprise by local government. In 2012, NUOSEN Machinery established the sales center in Hangzhou, which is located in 5A office building with magnificent river view of Qiantang River. It is adjacent to Hangzhou Xiaoshan International Airport and Hangzhou Railway Station.

NUOSEN Machinery is a Chinese factory which took over a famous Korean industry-leading corporation in 2013. At the same time, we brought in advanced production technology and technological process from Japan and built a research and development team which is able to create the world's top products independently. Lots of high-end production equipment were imported with original packing from Japan, Korea and other developed countries. The yearly volume of producing hydraulic breakers reaches about 12,000 and the extra-large type breaker hammer is in our production capacity as well. (The largest diameter of drill rod is about 280mm.) We and our products were certified by ISO9001, CE and other related certifications. Meanwhile, we also had the

OEM business of some international top brands in the world.

Our products range includes "Hydraulic Pressure + Nitrogen Gas" breaker, hydraulic compactor, hydraulic crusher, quick coupler and hydraulic breaker parts for all the models.

More than 200 agencies fully covered all provinces and cities in China. We also developed the overseas markets successfully, exported to America, Europe, Mid-east, India, and South-east Asia. NUOSEN Machinery goes towards the international brand of the world. No matter where you are, our full range of marketing solutions and superior after-sales service will arrive in time.



STRUCTURE AND FEATURES

Structure and Features

■ The key indexes of a hydraulic breaker is the hit frequency and hit energy. Each model of Rewin II series is equipped with powerful hit system hydraulic & nitrogen, with high efficiency, low power loss, and maximum twice—hit energy, which provide great hit energy.

Hit Energy Improved Structure


■ The outstanding design longer the running distance of piston and main body, making the breaker a maximum matching rate with the mainframe.

Flow Adjustable Device

■ The device gives effective adjustment of the flow from the grab or power source, which enable the adjustments according to the hardness of rocks, high hit energy with low hit frequency, low hit energy with high hit frequency.

High-Quality Materials & Specially Precise Process

■ Special precise process ensures the sealing, great hit energy and outbreak force, with high–quality materials ensuring durability.

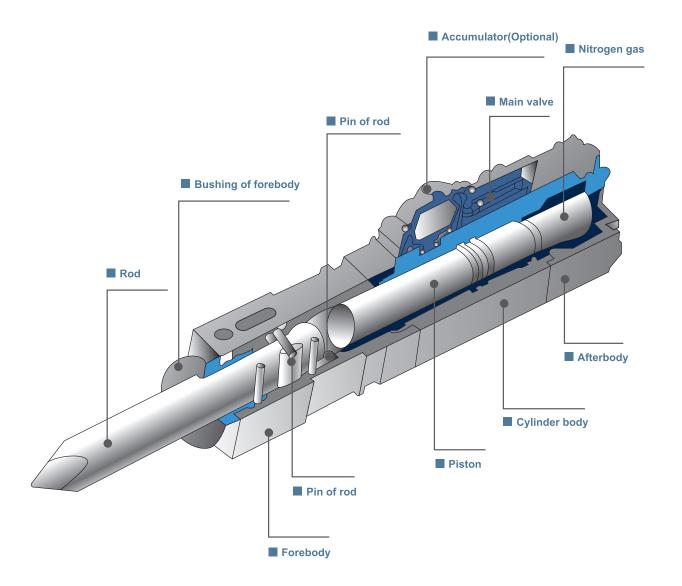




| ltem | | Unit | SMALL MODEL | | | | | |
|------------------------|-----------|-------|-------------|----------|----------|---------|---------|--|
| | | | RWB40 | RWB45 | RWB53 | RWB68 | RWB75 | |
| Weight | Box type | | - | - | - | 330 | 465 | |
| | Top type | Kg | 70 | 90 | 120 | 295 | 520 | |
| | Side type | | 73 | 100 | 120 | 280 | 460 | |
| Impact Frequency | | bpm | 800~1400 | 700~1200 | 600~1100 | 500~900 | 400~800 | |
| Operating Oil Pressure | | bar | 90~120 | 90~120 | 90~120 | 110~140 | 120~150 | |
| Relief | | bar | 120~150 | 120~150 | 120~150 | 150~170 | 170~180 | |
| Operating Flux | | I/min | 15~30 | 20~40 | 40~70 | 40~70 | 45~85 | |
| Rod Diameter | | mm | 40 | 45 | 68 | 68 | 75 | |
| Size of Tube | | inch | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | |
| Applicable Excavator | | ton | 0.8~2.5 | 1.2~3.0 | 2.0~4.5 | 4.0~7.0 | 6.0~9.0 | |





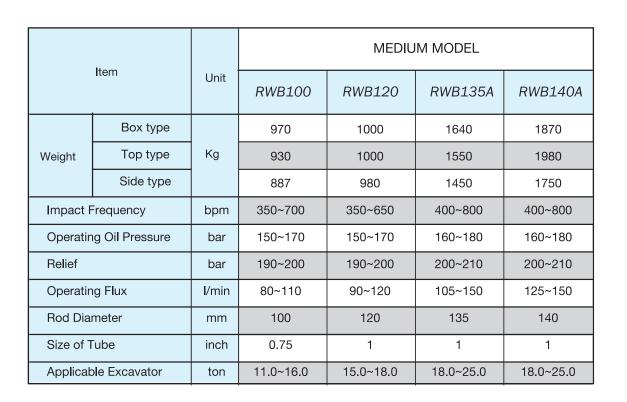



| ltem | | Unit | HEAVY MODEL | | | | | |
|------------------------|-----------|-------|-------------|-----------|-----------|-----------|--|--|
| | | | RWB155 | RWB165 | RWB175 | RWB190 | | |
| Weight | Box type | | 2930 | 3130 | 4479 | - | | |
| | Top type | Kg | 2900 | - | - | - | | |
| | Side type | | 2730 | 3350 | 4120 | 4500 | | |
| Impact Frequency | | bpm | 250-350 | 200-350 | 120-220 | 180-225 | | |
| Operating Oil Pressure | | bar | 160~180 | 180~200 | 200~220 | 200~230 | | |
| Relief | | bar | 200~220 | 200~240 | 240~260 | 240~270 | | |
| Operating Flux | | I/min | 180-240 | 200-260 | 210-290 | 240-300 | | |
| Rod Diameter | | mm | 155 | 165 | 175 | 189 | | |
| Size of Tube | | inch | 1 1/4 | 1 1/4 | 1 1/4 | 1 1/4 | | |
| Applicable Excavator | | ton | 28.0~35.0 | 30.0~45.0 | 40.0~55.0 | 50.0~65.0 | | |

COMPANY PROFILE

















■ COOPERATION Pleasant experiences
■ SERVICES Rapid, accurate, friendly, non–excuse
■ BRAND Globalized with faithful distributors and users in places
■ STAFF Focus and never pause on the way to target





- innovating, chasing

 EMOTION Loving, respecting, appreciating, requiting

 PERFORMANCE Let all customers be proud of Nuosen









EFFICIENCY EXTRAORDINARY EXPERT










SINCE 2016, WE HAVE
TAKEN PART IN THE MAIN
INTERNATIONAL MACHINERY EXHIBITION,
OUR BRAND IS ACCEPTED
BY OUR HONORABLE
CUSTOMERS.











SERVICE NETWORK

