

GEOWELL X REDHORN

DAEKEUM GEOWELL Co., Ltd
720 Dohwa-dong, Nam-gu, Incheon, KOREA
TEL. +82 32 874 0133 / FAX. +82 32 874 0250
E-mail : sales@geowell.co.kr


CYCLEAN SERIES

0.5 – 20M3/HR

30 – 40M3/HR



Performance

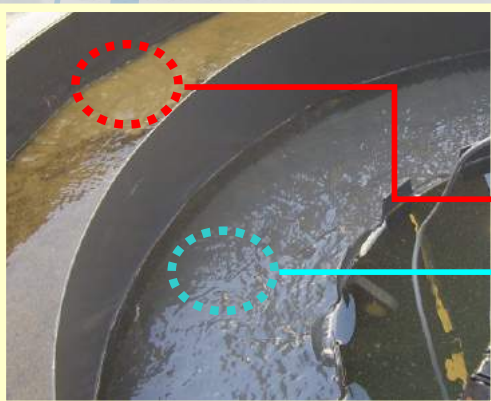

Before
800~1,000 NTU



After
10~20 NTU



Advantages

Low Maintenance Cost

Economic Price

Fully Automatic Operation

Low Manpower

Easy Installation

High Efficiency Treatment

■ CYCLEAN Series Line-up

CYCLEAN- 0.5/10/20



CYCLEAN – 30/40



■ Specifications

MODEL	CYCLEAN-0.5/10/20	CYCLEAN-30/40
Size (m) (L x W x H)	1.2 x 1.2 x 2.1	2.2 x 2.2 x 2.1
Capacity (m ³ /hr)	0.5-20m ³ /hr	30-40m ³ /hr
Weight	1 Ton	2 Tons
Frame	Steel	
Electric Control Panel	Double door stainless steel control panel (reduce chance of water penetration)	
Chemical Dosing Pump	Heavy duty dosing pumps with specs 3ph/400v	
Water pump	Heavy duty pump with specs 3ph/400v	

■ Application site

