



Truck-mounted concrete pump

BSF 58-5.16 H

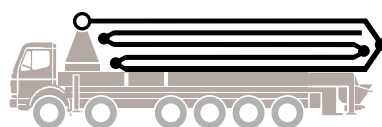

.16 H LS
.20 H

Output up to 200 m³/h
Delivery pressure up to 130 bar*

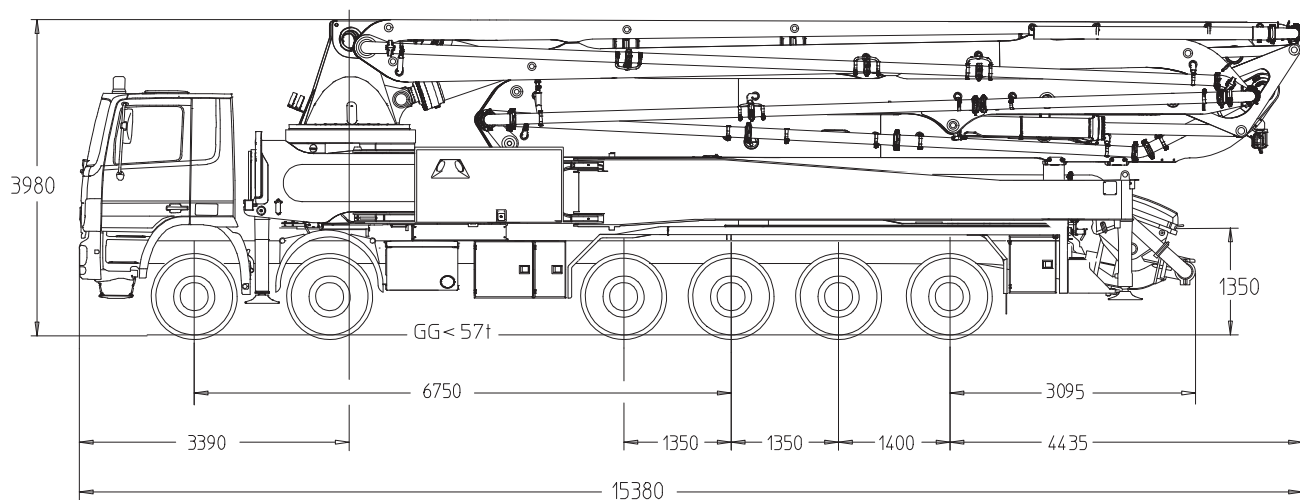

Note: Standard version. Dimensions and weights depend on truck, pump model and equipment.
Dimensions in mm, MB-Actros 5554 as example
Realisation on five axle truck possible

Technical Data

Boom M 58-5			
Sections			5
Reach height	m		57.6
Horizontal reach	gross	m	53.6
	net	m	49.5
Reach depth max.	m		42.4
Unfolding height	m		12.3
End hose length	m		3
Folding system			RZ
Delivery line			DN 125

Pump		BSF	.16 H	.16H LS	.20 H
Rod side	Output	m ³ /h	160	-	-
	Delivery pressure	bar	85	-	-
	Strokes	1/min.	31	-	-
Piston side	Output	m ³ /h	108	160	200
	Delivery pressure	bar	130	85	85
	Strokes	1/min.	21	26	26
	Delivery cylinder	∅ mm	230	250	280
	Stroke	mm	2100	2100	2100

*) Delivery line boom max. 85 bar.
All data maximum theoretical.

