
3PD-685-1220 "CAWASA" 3 Ton Pallet Truck

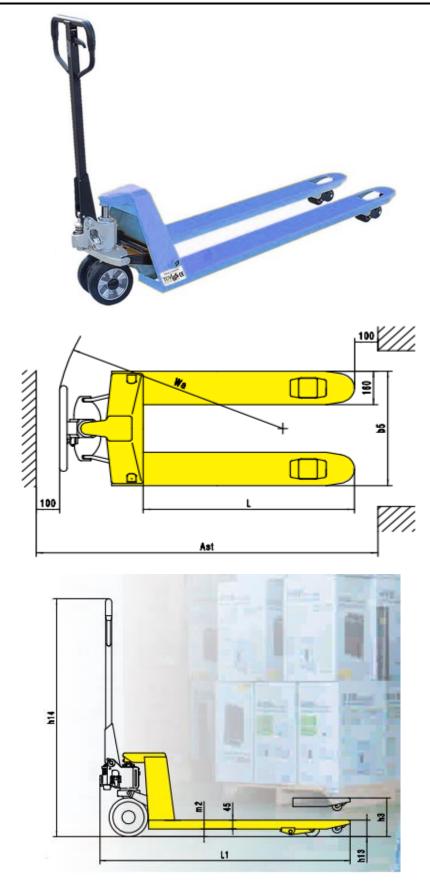

- •Most standard and popular model with capacity 2500-3000kgs.
- •With Copping Supporting NOG & strengthening ribbing under top triangle cover.
- •Complete pump design with reliable leak-proof pump eliminating maintenance and extending the service time.
- •210 steering arc, and small turning radius.
- Fork lowering speed is controllable, operated by hand control and foot pedal.
- •Entry/exit roller, more freely travel.
- Equipped with over-load valve, with long service time.
- •3 position hand control-Raise, Lower, Neutral.
- •12 lubrication grease nipples on all movable parts for easy maintenance.
- Adjustable pump cap ensures a long service life.
- Ergonomic large rubber handle with three control lever.

| Model | | 3PD-685-1220 |
|---|---------|----------------|
| Capacity | Q(kg) | 3000 |
| Lowered fork height | H13(MM) | 85 |
| Steering Wheel | Mm | Ф 200 |
| Fork Wheel single | Mm | Ф 80×93 |
| Fork Wheel tandem | Mm | Ф80×70 |
| Max. Lift Height | H3(mm) | 200 |
| Total Height | H14(mm) | 1603 |
| Overall Length | I1(mm) | 1544/1614 |
| Fork Length | s/e/I | 1220 |
| Width overall forks | B5(mm) | 685 |
| Type of Wheel | | PU Double |
| Ground clearance, centre of wheelbase | m2(mm) | 40 |
| Aisle width for pallets 1000x1200 crossways | Ast(mm) | 1803 |
| Aisle width for pallets 800×1200 lengthways | Ast(mm) | 1803 |
| Turning radius | | 1336 |
| Weight | Kg | 75 |