

ALP SERIES
SUPER MATERIAL LIFT

ALP SERIES



Standard Features


- Incorporates a silent ratchet system
- Transportation wheels
- Roller wheels with brake
- Standard forks
- Telescopic mast design
- Solid Steel base

Options Features


- Adjustable Forks
- Flat Forks
- Boom
- Pipe cross Forks
- Load Platform
- Anti-fall function

Model	ALP-10	ALP-15	ALP-20	ALP-25
Measurements				
Working height				
(1) standard forks-up	3.48 m	5.00m	6.45m	7.95m
(2) standard forks-down	2.96 m	4.48m	5.93m	7.43m
Adjustable forks-up	3.48m	5.00m	6.45m	7.95m
Adjustable forks-down	2.96m	4.48m	5.93m	7.43m
Flat forks	2.96m	4.48m	—	—
Boom***	3.28m	4.76m	6.25m	7.42m
Load platform**-fork up	3.49m	4.98m	6.46m	7.94m
Load platform**-fork down	2.97m	4.46m	5.94m	7.42m
(3)Height-stowed	1.98m	1.98m	1.98m	1.98m
(4)Length-stowed	0.75m	0.75m	0.75m	0.83m
(5)Length-operating	2.2m	2.2m	2.2m	2.2m
(6)Width-stowed*	0.79m	0.79m	0.79m	0.79m
-stabilizers lowered	1.9m	1.9m	1.9m	1.9m
Width-straddle base*				
Minimum	0.80m	0.80m	—	—
Maximum	1.47m	1.47m	—	—
Maximum inside	1.27m	1.27m	—	—
(7)Ground clearance-center	0.05m	0.05m	0.05m	0.05m
Load height minimum	0.15m	0.15m	0.15m	0.15m
Productivity				
Load capacity				
46cm load center	454kg	363kg	363kg	295kg
61cm load center	454kg	363kg	272kg	204kg
1.07m load center	181kg	227kg	159kg	113kg
Power				
Power	Single speed winch			
Weight				
Standard	163kg	183kg	203kg	224kg

AMP Collecting Chart

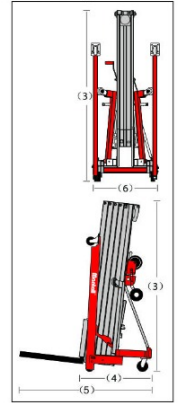

ALP Working Range



*Outside dimensions.
**For use with standard and adjustable forks only.
***Measured from ground to bottom of shackle.