



Self-propelled scissor lift

JCPT0507DC / JCPT0607DC

Self-propelled scissor lift JCPT0507DC / JCPT0607DC

STANDARD EQUIPMENT

- Proportional controls
- Self-lock gate on platform
- Extended platform
- Drivable at full height
- Non marking tires
- 2 WD
- Automatic brake system
- Emergency lowering system
- Emergency stop buttons
- Overload sensor with alarm
- Cylinder holding valve
- Tilt sensor with alarm
- All motion alarm
- Horn
- Hour meter
- Safety brackets
- Forklift pockets
- Charger protection
- Flashing beacon


OPTIONS

- AC power to the platform



SPECIFICATIONS

	JCPT0507DC	JCPT0607DC
S.W.L.	240 kg	240 kg
S.W.L. on extension	100 kg	100 kg
Maximum workers	1	1
Working height	5,00 m	5,90 m
Platform floor height	3,00 m	3,90 m
Overall length	1,15 m	1,15 m
Overall width	0,76 m	0,76 m
Overall height	1,85 m	1,94 m
Platform size	1,15 x 0,70 m	1,15 x 0,70 m
Platform extension size	0,55 m	0,55 m
Ground clearance	0,05 m	0,017 m
Wheelbase	1,03 m	1,03 m
Turning radius	0	0
Drive motors	2 x 24 DC / 0,3 kw	2 x 24 DC / 0,4 kw
Lifting motors	24 DC / 0,8 kw	24 DC / 0,8 kw
Travel speed (stowed / raised)	4,0 / 0,8 km / h	4,0 / 0,8 km / h
Up / down speed	28 / 20 sec	32 / 21 sec
Batteries	2 x 12 V / 95 Ah	2 x 12 V / 95 Ah
Integrated charger	24 V / 10 A	24 V / 10 A
Gradeability	25 %	25 %
Maximum working slope	2°	2°
Driving wheels	Ø 230 x 80 mm	Ø 230 x 80 mm
Front wheels	6 in	6 in
Weight	554 kg	615 kg

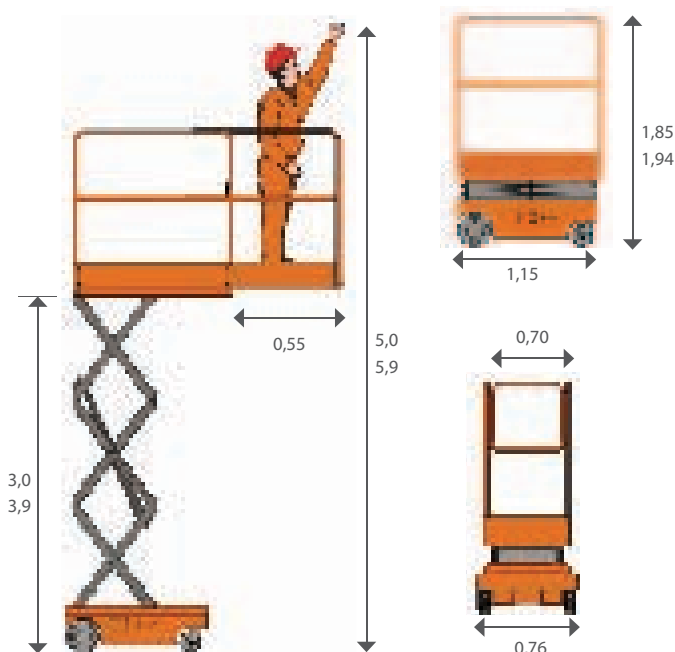

This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

www.dingli.eu

INSTANT

Norway
Tel.: +47 23 19 11 00
info@instant.no

Lithuania
Tel.: +370 5 233 1096
info@instant.lt

Latvia
Tel.: + 371 263 58 152
info@instantlatvija.lv

Estonia
Tel.: +372 680 76 33
info@instant.ee