
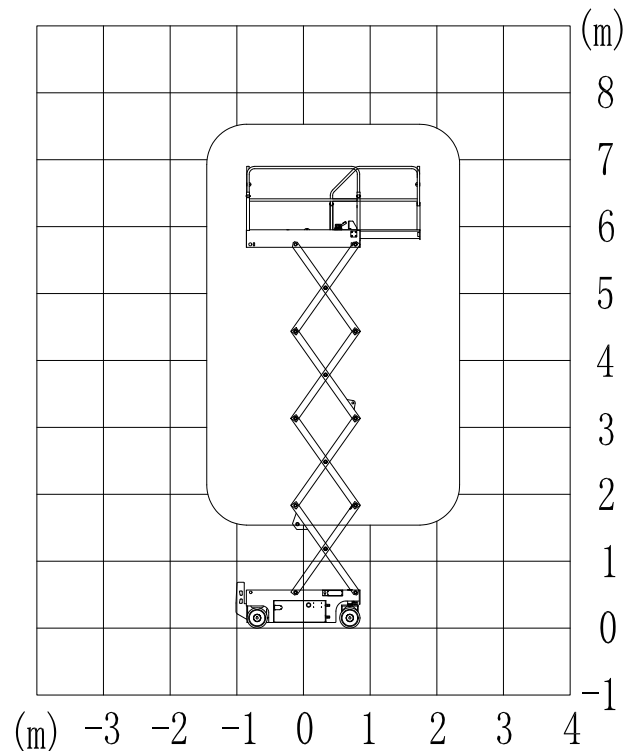


## GTJZ06-6m ELECTRIC SCISSOR LIFT

| Model                         | GTJZ06       |
|-------------------------------|--------------|
| Working Height Maximum        | 8.2m         |
| Platform Height Maximum       | 6.2m         |
| Max platform occupancy        | 2            |
| Lift capacity                 | 380kg        |
| Lift capacity-extension deck  | 120kg        |
| Length(stowed) ①              | 2.485m       |
| Width(stowed) ②               | 1.06m        |
| Height(stowed)③               | 2.2m         |
| Height(guardrail fold stowed) | 1.8m         |
| Platform height minimum ④     | 1.1m         |
| Platform measurement ②*①      | 2.26*0.82m   |
| Length extension deck         | 0.9m         |
| Ground clearance-center       | 100/20mm     |
| Turning radius Minimum        | 0/2.1m       |
| Travel speed(stowed)          | 3.2km/h      |
| Travel speed(raised )         | 0.8km/h      |
| Grade-ability                 | 25%          |
| Max. allowable slope          | 2° / 3°      |
| Tire                          | Φ 381*127 mm |
| Weight                        | 1880kg       |
| Lift motor                    | 24/3 v/kw    |
| battery                       | 4*6/216V/Ah  |
| Charger                       | 24/20-30 V/A |

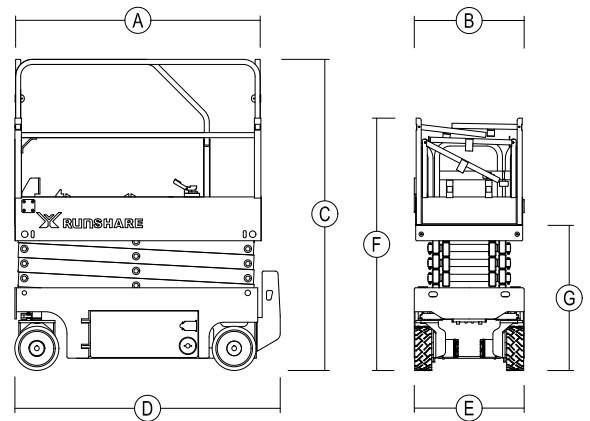

### CONFIGURATION

|                                                      |
|------------------------------------------------------|
| DC motor --Bucher (USA)/ CB (China)                  |
| Hydraulic Pump--Bucher ( USA )/Parker (China)        |
| Valve--Hydrofoss ( USA )                             |
| Brake--White (USA)/Dali (China)/Yiqun (China)        |
| RE motor--White ( USA ) / Dali (China)               |
| Brake release pump--White (USA ) / Qiangtian (China) |
| Battery--US (USA) / Trojan ( USA )                   |
| Charger--Longsheng ( China )                         |
| Controller-DLT(USA)/ Ruitai /Zhongdian (China)       |
| Hour meter--Curtis ( USA)/ Honeywell ( USA)          |