



## GTZZ20A-20m Diesel articulated boom lift

| Model                            | GTZZ20A                                    |
|----------------------------------|--------------------------------------------|
| Working Height Maximum           | 22m                                        |
| Platform Height Maximum          | 20m                                        |
| Working radius maximum           | 12.6m                                      |
| Lifting capacity                 | 230kg                                      |
| Up & Over height maximum         | 9.2m                                       |
| Length( stowed) ④                | 9.07m                                      |
| Width (stowed) ⑤                 | 2.38m                                      |
| Height(stowed) ③                 | 2.49m                                      |
| Wheel base ⑥                     | 2.4m                                       |
| Ground clearance ⑦(Center)       | 430mm                                      |
| Platform dimension ②*①           | 1.83*0.76                                  |
| Tuning radius (inside)           | 2.66m                                      |
| Tuning radius (outside)          | 5.66m                                      |
| Travel speed(stowed)             | 4.2km/h(4WD)                               |
| Travel speed(raised or extended) | 1.1km/h                                    |
| Grade ability                    | 45% (4WD)                                  |
| Solid tire                       | 33*12-20                                   |
| Swing speed                      | 0~0.8rpm                                   |
| Turn table swing                 | 360 Continuous                             |
| Platform leveling                | Automatic leveling                         |
| Platform rotation                | ±80                                        |
| Fuel tank volume                 | 100L                                       |
| Total weight                     | 8800kg(4WD)                                |
| Control voltage                  | 12V                                        |
| Drive &Steering mode             | 4*4*2                                      |
| Engine                           | Yanmar 4TNV94L-BXPHZ<br>42kw35.5kw/2200rpm |

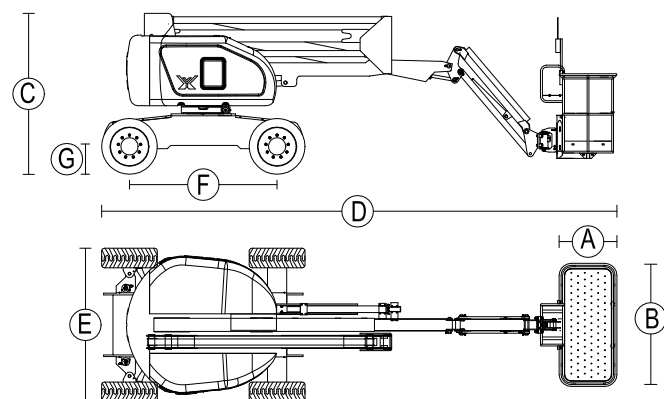

### GTZZ20A RANGE OF MOTION

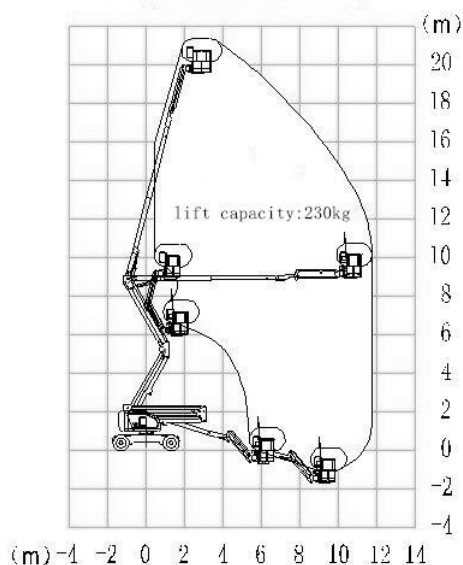

### CONFIGURATION

|                 |                                            |
|-----------------|--------------------------------------------|
| Engine          | Yanmar (Japan);                            |
| Driving pump    | SAUER (USA)/Hi-tech(China)/Poclain(France) |
| Lifting pump    | Hi-tech(China)/Cassapa(Italy)              |
| Travel motor    | SAUER(USA)/Hi-tech(China)/Hengli(China)    |
| Travel reducer  | Infinite(China)/Omni(Italy)                |
| Hydraulic valve | Hydroforce (USA)                           |
| Rotary motor:   | Whlionshare(China)                         |

